

Distributed by
Raymarine

Any reference to Raytheon or RTN in this manual should be interpreted as Raymarine. The names Raytheon and RTN are owned by the Raytheon Company.

ST50 DEPTH

Installation and Operation

Autohelm™

Contents

1. Specifications	2
2. Control Head Installation	3
2.1 Siting	3
2.2 Mounting Procedure	3
2.3 Power Supply	4
2.4 Connection to Adjacent Instruments	4
2.5 Connection to Separated Instruments	4
2.6 Ring Connection	5
2.7 Connection to SeaTalk Compatible Autopilots	5
3. Transducer Installation	6
3.1 Connection to Instrument	6
3.2 Transducer Selection	6
3.3 Transducer Installation	6
4. Fault Finding	7
5. Maintenance	8
5.1 Control Head	8
5.2 Through Hull Transducers	8
5.3 Cabling	8
6. Operation	9
6.1 Set Up	9
6.1.1 Alarm Set Up	10
6.1.2 Offset Set Up	10
6.1.3 Measurement Unit Selection	10
6.1.4 Display Contrast Adjustment	10
6.2 Illumination	11
6.3 Depth	12
6.4 Shallow/Deep Alarms	13
6.5 Keel/Waterline Offsets	13

Specifications

Depth can be used as a stand-alone unit, or when connected to the SeaTalk supply information to the Multifunction a Tridata Repeater.


Displays in this manual correspond to an ST50 depth unit set up to display feet. For an ST50 depth unit set up to display metres, all displays are in metres. Arrows indicate significant changes in depth.

It is not possible to use the ST50 Depth as a depth unit without a transducer input. A dedicated repeater is required use Multifunction Display.

Specifications

- Power supply
 - 11V to 16V DC at 50ma (illumination off).
- Operating Temperature
 - 0°C to +70°C.
- Size
 - 110mm (4.33in) x 110mm (4.33in) x 24mm (1in) Overall depth 39mm (1.5in).
- Computer
 - 8 bit Intel Microprocessor + 8K Rom.
- Display
 - Custom dot matrix/7 segment liquid crystal display (LCD).
- Depth
 - 0.8 to 180 metres
 - 2.5 to 600 feet (0.4 to 100 fathoms).
- Shallow Alarm
 - Audible and Visual, 2 minute inhibit, 1 to 10 metres (3 to 33 feet), user resettable, permanently stored.
- Deep Alarm
 - Audible and Visual, 30 second auto cancel, sounds on crossing 3 to 120 metres (10 to 400 feet), user resettable. Resets and cancels on power down.
- Anchor Watch
 - Combined Shallow/Deep alarm.
- Offset
 - Keel or Waterline, 0 to 3 metres (0 to 10 feet), user resettable, permanently stored.
- Illumination
 - 3 levels and OFF, user selectable.
- Display Unit Selection
 - Feet/Fathoms or Metres, user selectable, permanently stored.

2. Control Head Installation

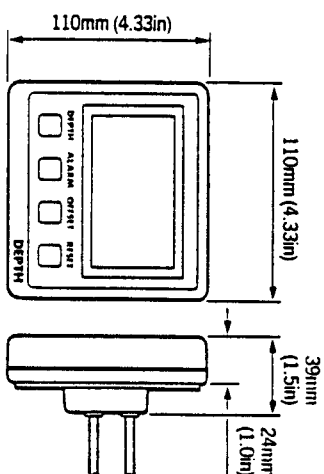

2.1 Siting

The ST50 depth instrument is designed for above or below deck installation. Position where it is:-

- Easy to read by the helmsman.
- Reasonably well protected from physical damage.
- At least 230mm (9in) from a compass.
- At least 500mm (20in) from radio receiving equipment.
- Accessable from behind to secure in place and run cables.
- Normally viewed straight on for best display legibility.

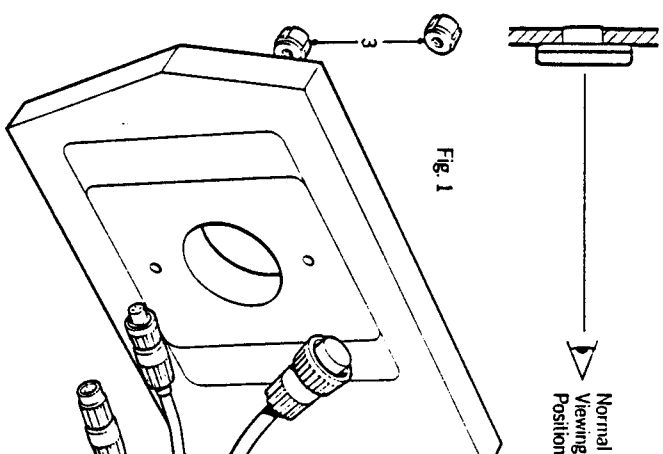


Fig. 1

Note: The back cover is designed to breathe through a duct in the cable boss to prevent moisture accumulation.

2.2 Mounting Procedure (Fig. 1)

- The mounting surface must be smooth and flat.
- Use the template provided to mark the centres of the two fixing holes and central boss.

Note: Adjacent units should have a 6mm (1/4in) separation to allow room for the protective covers.

- Drill to 4mm (5/32in) diameter.
- Use a 50mm (2in) diameter cutter to drill the hole for the central boss 1.
- Screw the two fixing studs 2, into the back cover.
- Pass the cable tails through the central hole and secure the instrument with the thumb nuts provided 3. (A sealing gasket 4 is already attached to the back cover).

Bracket Mounting (Fig. 2)

As an alternative to surface mounting, a bracket mounting kit (Cat. No. D130) is available to allow the instruments to be bracket mounted.


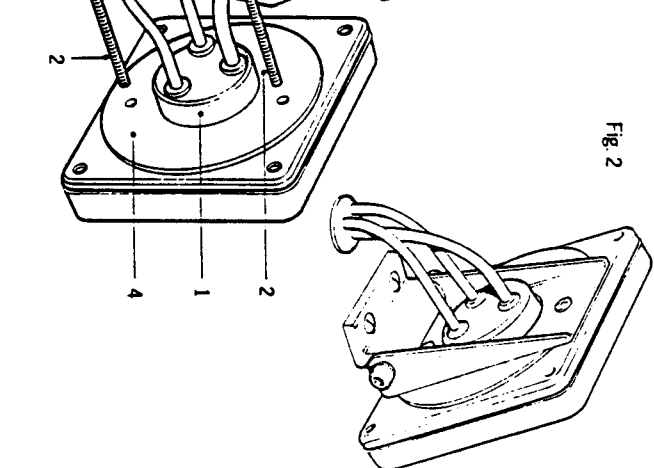



Fig. 2

Power Supply (Fig. 3)

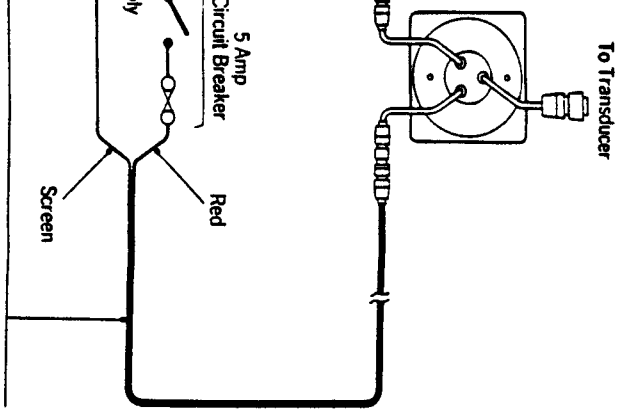

2.4 Connection to Adjacent Instruments (Fig. 4)

Fig. 4

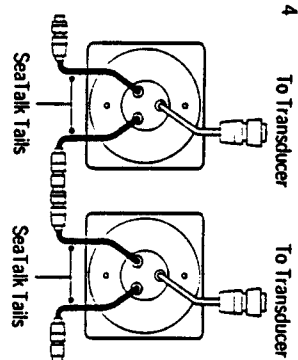

All instruments receive both power and information from the SeaTalk bus. Each instrument has two SeaTalk connectors (3 pin) on short 150mm (6in) tails to allow adjacent units to simply plug together.



2.5 Connection to Separated Instruments (Fig. 5)

Separated instruments are connected using the SeaTalk Extension Cable (Cat. No. D131). This is supplied with a SeaTalk connector fitted to each end and with a junction box to rejoin the cable if it is cut to ease routing or for shortening.

If preferred, any 2 core screen cable which has the following specification may be used in the place of the SeaTalk cable.

Minimum Copper Area	
Screen	0.5mm ²
2 Cores	0.5mm ²

Fig. 5

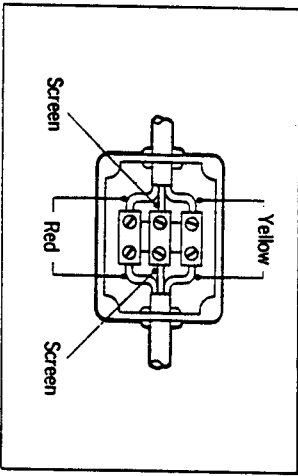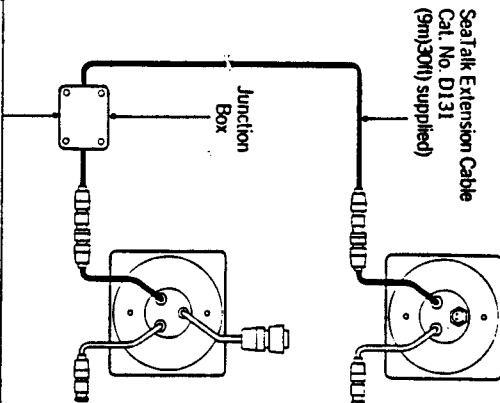

2.6 Ring Connection

Installations with a large number of instruments on the SeaTalk bus may require a second ring main connection to the Power Supply to avoid excessive voltage drops. This can be checked using the table below:-


SeaTalk Cable Length	Max. Number of Units	
	Single Connection	Second Connection
Up to 10m (33ft)	13	26
Up to 20m (66ft)	7	13

The second connection should be made to the spare lead on the last instrument and led back to the circuit breaker.

2.7 Connection to SeaTalk Compatible Autopilots (Fig. 6)

If the vessels installation includes a SeaTalk Compatible Autopilot the ST50 Instruments may be connected into the SeaTalk bus at any point. No separate connection to the 12V power supply is necessary as the instruments will receive power via the bus from the Autopilot Course Computer.

Fig. 6

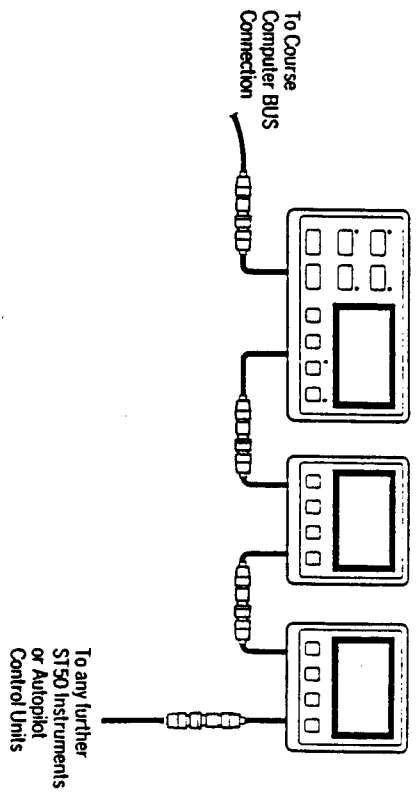

Installations only require one connection to power supply. s connected to the first SeaTalk ent using the 2 metre cable supplied. he connector into the instrument and other end back to the vessel's ion panel. Cut the cable to length, directly to the distribution panel and with a 5A circuit breaker. Connect the ire to +12V and the screen to 0V. The ire should be cut back and insulated. r runs to the power supply can be made e SeaTalk Extension Cable (Cat. No. hich is 9m (30ft) long.


4. Fault Finding

All Autohelm products are subject to a

comprehensive test procedure prior to packing and shipment. In the unlikely event that a fault does arise the following check list should help cure the problem.



- Use a 50mm (2in) diameter cutter to drill the hole from the outside.
- Emery to remove burrs and roughen the surface to provide a good key. Clean inside and outside the hull removing any grease with a weak solvent cleaner or household detergent.



- Remove the nut 1 from the through hull fitting 2 and apply sealing compound 3 to the mating flange and run the thread 6mm (1/4in)

- Assemble the through hull fitting making sure not to overtighten the nut!

- Remove excess sealing compound.
- Remove 'warning' label from transducer face and clean with a household detergent.
- Check for leaks immediately the vessel is

Cabling

Avoid running the transducer cable close to other signal cables as it may cause interference. This includes the speed Averaging cable.

The depth transducer cable length (including Triducers) must not be extended or shortened as this will affect performance. Excess cable should be coiled.

underway

Control Head

Under certain conditions, condensation may appear on the window. This will not harm the instrument, and can be cleared by switching the illumination to the brightest level. Use any chemical or abrasive materials on your ST50 Depth Instrument. If the instrument becomes dirty wipe clean with a cloth.

Through Hull Transducers

Periodically check the through hull fitting for the outside of the through hull fitting, or external transducer face with a stiff and protect with a single coat of caulking.

5.3 Cabling

- Avoid running cables through bilges where possible and secure any coiled lengths at regular intervals.
- Avoid running cables close to fluorescent lights, engine, radio transmitting equipment etc.
- Check cabling for chafing or damage to outer casing, replace where necessary and re-secure.

Advice

Should any difficulties arise, please consult Nautech Product Support Department in the U.K. or your own National Distributor who will be able to provide expert assistance.

6. Operation



The ST50 depth instrument can be used as an individual module or connected to other instruments to provide part of a fully integrated instrumentation system which can be linked to any of the Autohelm SeaTalk compatible autopilots.

6.1 Set Up


The ST50 depth is set up in the factory to:-

- Display depth in Feet/Fathoms.
- Have Deep Alarm switched off.
- Have Shallow Alarm set to 10 feet.
- Keel/Waterline offset set to zero.
- Display Contrast adjustment set to suit viewing normal to instrument face. These can be changed to suit your preferences as follows:-

- Push and hold down for 2 seconds Depth and Alarm together to select calibration mode.




- Push Depth to select shallow/deep alarm or keel offset required.
- The selected value is adjusted using Reset (▲) to increase, Offset (▼) to decrease. 1 second hold down provides fast scroll.




Alarm Set Up

Alarm




alarm



switch alarms off set to 0 (as illustrated).



Offset Set Up



n Depth of Keel below Transducer.
offset reduces displayed depth.


Or Waterline:-



- Set in Depth of Transducer below waterline.
- Waterline offset increases displayed depth.




6.1.3 Measurement – Unit Selection



- Push **Offset** or **Reset** to change display units between **FEET/FM** and **METRES**.
- Push and hold down for 2 seconds **Depth** and **Alarm** together to exit calibration mode and store the alarm, offset, and measurement unit selection values.

6.1.4 Display Contrast Adjustment


The LCD viewing angle can be user set to achieve optimum display legibility.



- Momentarily push **Depth** and **Alarm** together.





- Push **Reset** to increase and **Offset** to decrease the contrast level.
 - Adjust for optimum contrast.
 - Momentarily push **Depth** and **Alarm** together to store the display setting.
- Note: Increasing the display setting will suit installations where the instrument is normally viewed from below.

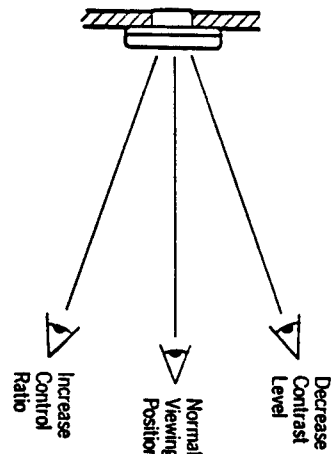

6.2 Illumination

Control of Illumination levels is common to all ST50 Instrument Modules. The control is always selected using the **left hand** push button.

- Push and hold down the **Depth** button for 1 second to switch **ON** (if **OFF**), or to display current illumination level (if already on).




- Push **Depth** button within 8 seconds to select required illumination level.
- | | |
|----------|--------|
| Lamp 3 | High |
| Lamp 2 | Medium |
| Lamp 1 | Low |
| Lamp OFF | Off |

The display will return to previous status after 8 seconds.

Depth

Fathoms

Display Sequence: DEPTH



Depth in Feet



Depth in Fathoms



Minimum Depth*




* Minimum depth from power up or Reset.
Push Reset to reset.

returns to current water depth after 8

Metres

Display Sequence: DEPTH



● Depth in Metres



● Minimum Depth*




— Minimum depth from power up or Reset.
— Push Reset to reset.

* Display returns to current water depth after 8 seconds.


Note: Feet/Fathoms or Metres displayed according to calibration selection.

6.4 Shallow/Deep Alarms


Display Sequence: ALARM



● Shallow Alarm*



● Deep Alarm*



Note: Feet or Metres displayed according to calibration selection.

Depth Alarm Operation

When an alarm condition exists, the alarm is displayed, the buzzer sounds and the alarm legend flashes.

● Shallow Alarm

— Sounds when depth falls below the selected value.

— Push Alarm to silence alarm. If the alarm condition exists after 2 minutes the alarm will sound again.


● Deep Alarm

— Sounds when depth crosses the selected value (can be increasing or decreasing).


— Push Alarm to silence and switch off alarm. If left the alarm will automatically switch off after 30 seconds.

6.5 Keel/Waterline Offsets

Display Sequence: OFFSET



● Keel Offset/Waterline Offset*



— Keel offset reduces displayed depth.



— Waterline offset increases displayed depth.

Display will show either Keel offset or W/L offset according to calibration offset selected.

* Display returns to current water depth after 8 seconds.